

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



Europäisches Patentamt

Eur pean Patent Office

Office urop'en des brev ts



(11)

EP 1 013 480 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
28.06.2000 Bulletin 2000/26

(51) Int. Cl.<sup>7</sup>: B60C 11/12, B60C 11/13

(21) Application number: 99125270.1

(22) Date of filing: 17.12.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Caretta, Renato  
21013 Gallarate (Varese) (IT)

(74) Representative:  
Tansini, Elio Fabrizio  
C/O Bugnion S.p.A.,  
Viale Lancetti 17  
20158 Milano (IT)


(30) Priority: 23.12.1998 EP 98830779

(71) Applicant:  
PIRELLI PNEUMATICI  
S.p.A.  
20126 Milano (IT)

### (54) A tyre for vehicle wheels

(57) A tyre particularly adapted for running on a snow-covered roadway has a tread band (1) in the blocks (2, 3) of which a first and a second series of sipes (8, 9) are formed, which are inclined in respectively opposite ways relative to a direction normal (n) to the rolling surface (S) of the tread band (1). The sipes (8, 9) extend according to a curvilinear concave extension towards acute-angle grip edges (10a) exhibited by

respective flexible portions (10) delimited in the blocks (2, 3) by the sipes themselves. Each block (2, 3) is peripherally confined by transverse grooves (5) and longitudinal grooves (4) each having a first side (11, 14) normal to the rolling surface (S) and a second side (12, 15) diverging from the first side towards the rolling surface itself.

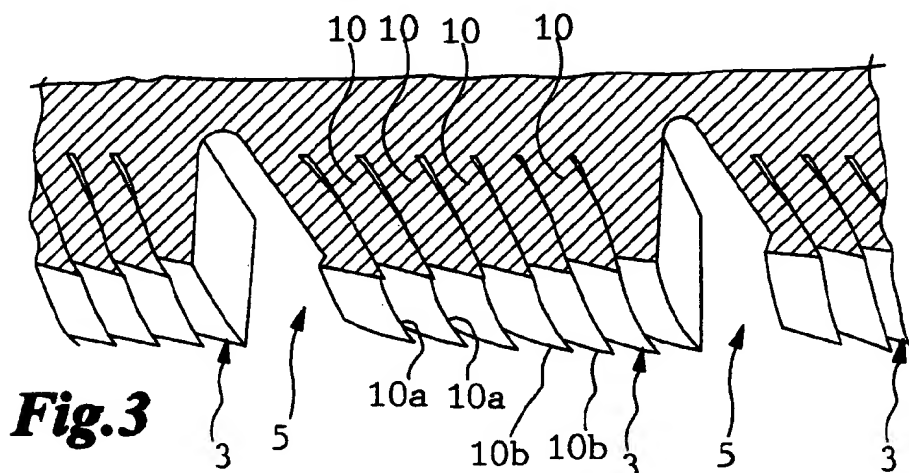

**Fig. 3**

EP 1 013 480 A1

## Description

[0001] The present invention relates to a tyre for vehicle wheels of the type provided with a tread band comprising: a plurality of raised blocks each peripherally confined between at least two longitudinal grooves substantially extending circumferentially of the tyre, and at least two transverse grooves joining said longitudinal grooves; a first series of sipes and a second sipes formed in said blocks, each according to an inclined orientation relative to a direction normal to an outer rolling surface of the tread band, to divide each block into a plurality of flexible portions disposed circumferentially in side by side relationship, each having a grip edge in the form of an acute angle on said outer rolling surface.

[0002] In more detail, the invention is directed to a tyre of the so-called "winter" type and to a method of making such a tyre, the tread band of which has a tread pattern particularly suitable for running on snow-covered and/or frozen roadways.

[0003] Tyres of the winter type are required to have, in addition to excellent behavioural features as regards running on a snow-covered roadway, also a good qualitative level in connection with other operation features such as rolling smoothness, running behaviour on a wet surface and kilometric yield.

[0004] Other features that, although of less importance than the preceding ones, also help in giving a better or worse qualitative evaluation of a winter tyre are running behaviour on a dry surface and quietness on running.

[0005] The above mentioned behavioural and operational features are determined by making appropriate circumferential and transverse grooves into the tread band, which grooves must be suitably sized and oriented, so as to give rise to formation of blocks normally aligned in rows disposed consecutively in side by side relationship and extending circumferentially of the tyre.

[0006] In addition, the presence of an appropriate lamelliform pattern in the blocks, i.e. a thick series of narrow cuts disposed consecutively in side by side relationship in a circumferential direction and oriented substantially transversely of the rolling direction is significant indispensable as regards achievement of particular behavioural running features on a snow-covered roadway.

[0007] The task of these narrow cuts, more simply called "sipes" is substantially that of picking up and efficiently retaining the snow, since friction created by snow against snow is, as known, greater than friction of rubber on snow.

[0008] In US Patent 4,298,046, herein mentioned as an example of the state of the most pertinent prior art, it is described a winter tyre the tread band of which has four circumferential rows of blocks, confined by substantially straight circumferential grooves and transverse grooves, straight as well, having walls substantially normal to an outer rolling surface, on

which contact between the tread band and roadway surface occurs.

[0009] For the purpose of achieving improvements in terms of traction power and grip performance on braking it is provided that blocks belonging to the axially outer rows, located close to the tyre shoulders, should have sipes oriented according to an inclination of about 30° relative to the rolling surface and extending on the rolling surface itself according to a substantially straight extension parallel to the tyre rotation axis. Blocks belonging to the circumferential rows placed in the middle region of the tyre have sipes similar to those formed in the blocks belonging to the shoulder rows, but inclined in the opposite direction relative to the latter.

[0010] In each block, sipes define a plurality of flexible portions that, due to the inclination of the sipes themselves, exhibit a sharp-corner edge capable of exerting an efficient grip on the roadway surface. By assigning a given direction of rotation to the tyre, the acute-angle edges of the flexible portions belonging to the blocks of the shoulder rows are made efficient during the acceleration step, while the acute-angle edges of the flexible portions of the blocks belonging to the centre rows exert their efficiency during the braking step.

[0011] In Patent EP 498287 it is described a tyre in which the transverse grooves delimiting the tread band blocks have an inclined orientation relative to a direction normal to the rolling surface, in order to improve evenness in wear of the blocks themselves. The transverse grooves belonging to the blocks of the circumferential shoulder rows have an opposite orientation relative to that of the blocks belonging to the centre rows. In addition a different direction of rotation is assigned to the tyre, depending on whether it is associated with a driving wheel or a driven wheel of the motor-vehicle.

[0012] In patent EP 384182 and in the Italian Patent Application MI94A000309 tyres for heavy duty vehicles are described which are provided with circumferential rows of blocks delimited by transverse cuts of reduced width having an inclined orientation relative to a direction normal to the rolling surface of the tread band.

[0013] In accordance with the present invention it has been found advantageous for the blocks in the tread band to be provided with sipes having an inclined orientation relative to the rolling surface and a curvilinear transverse extension, or in any case such arranged as to define a concavity turned towards the acute-angle grip edge exhibited by one of the two flexible portions delimited by the sipe itself. Thus the grip effect on traction and/or on braking is improved, above all on a snow-covered and/or frozen roadway, in that the consequent conformation of each flexible portion makes this portion substantially behave like a small shovel cutting and picking up the snow and accumulating and holding it at the inside of the sipe.

[0014] In more detail, it is an object of the present invention to provide a tyre for vehicle wheels, character-

ized in that each sipe extends transversely of the block according to a concave extension towards the grip edge of the corresponding flexible portion.

[0015] Preferably, sipes belonging to the first series and the second series are distributed in respective circumferential rows disposed axially in side by side relationship and advantageously arranged in an alternate sequence.

[0016] More particularly, each circumferential row of sipes belonging to the first and second series respectively is preferably associated with a respective circumferential row of blocks.

[0017] Advantageously, each sipe may be provided to extend transversely of the block substantially over the whole width thereof.

[0018] Each sipe may possibly have at least one end portion of reduced depth close to the longitudinal groove delimiting the respective block.

[0019] In a preferential embodiment, each sipe has a substantially curvilinear extension symmetric with the longitudinal centre line of the respective block.

[0020] In addition, each of said flexible portions may be provided to have opposite ends inclined to the extension direction of the corresponding longitudinal grooves, to define side toothings projecting into the longitudinal grooves in said block.

[0021] In accordance with a further aspect of the invention application of which can also take place independently of the conformation of the transverse extension of the sipes, it has been found advantageous for each of said transverse grooves to be confined between a first side substantially normal to the outer rolling surface of the tread band, and a second side diverging from the first side towards the rolling surface itself.

[0022] Preferably said second side, relative to the rolling surface, has an orientation similar to or concordant with that of the sipes of the corresponding block.

[0023] It may be also provided that each block should have, close to said rolling surface, at least one transverse edge projecting towards the corresponding transverse groove to define an undercut with the second side of the transverse groove itself.

[0024] Advantageously, each of said transverse grooves extends in a direction substantially parallel to the extension of the sipes, and the transverse grooves belonging to blocks disposed mutually in side by side relationship in an axial direction are disposed consecutively so as to define substantially continuous transverse grooves extending according to an undulated extension.

[0025] It may be conveniently provided that each of said longitudinal grooves should be confined between a first side substantially normal to the rolling surface and a second side diverging from the first side in the direction of the rolling surface itself.

[0026] Each block may also have, close to the rolling surface, at least one longitudinal edge projecting towards the corresponding longitudinal groove, to

define an undercut with the second side of the longitudinal groove itself.

[0027] Preferably, in each of said longitudinal grooves the mutual positioning of the first and second sides is inverted relative to the mutual positioning of the first and second sides of the circumferentially contiguous longitudinal grooves.

[0028] Conveniently, the longitudinal grooves are consecutively disposed so as to define substantially continuous circumferential grooves.

[0029] Preferably, each of said longitudinal grooves has an inclined extension relative to a direction circumferential to the tyre, so that each of said circumferential grooves extends in the form of a broken line.

[0030] In a preferential embodiment of the tyre in accordance with the invention, at least two circumferential rows of shoulder blocks are provided which extend close to the opposite side edges of the tread band, as well as one or more circumferential rows of centre blocks disposed symmetrically relative to an equatorial plane of the tyre, the blocks disposed on either side of the equatorial plane respectively having correspondingly opposite orientations.

[0031] In accordance with a different aspect, the invention relates to a method of increasing snow trapping in tread patterns for tyres of vehicle wheels, comprising the steps of: making rows of blocks, each confined between longitudinal and transverse grooves relative to a circumferential extension direction of the tyre; dividing each block into a plurality of flexible portions by a plurality of sizes extending inwardly of the tyre starting from a radially outer rolling surface; shaping said sipes into a concave line on said rolling surface; and inclining each sipe preferably at an angle included between 20° and 35° relative to a straight line normal to the rolling surface.

[0032] Further features and advantages will become more apparent from the detailed description of a preferred non-exclusive embodiment of a tyre for vehicle wheels in accordance with the present invention. This description will be taken hereinafter with reference to the accompanying drawings, given by way of non-limiting example, in which:

- Fig. 1 is a fragmentary plan view illustrating a tread band of a tyre made in accordance with the present invention;
- Fig. 2 is a fragmentary perspective bottom view highlighting a block of the tread band, sectioned in a diametral plane relative to the rotation axis of the tyre;
- Fig. 3 is a representation similar to Fig. 2, highlighting the deformation undergone by the flexible portions of the block by effect of forces produced in the footprint;
- Figs. 4 and 5 show the profile in cross-section of the longitudinal grooves of the tread band, sectioned along lines IV and V in Fig. 1;

- Figs. 6 and 7 show the profile in section of the transverse grooves delimiting the blocks of the shoulder rows and the centre rows respectively in the tread band, sectioned along lines VI and VII in Fig. 1;
- Fig. 8 is a section taken along line VIII in Fig. 1, highlighting the profile in longitudinal section of a sipe.

[0033] Referring particularly to Fig. 1, a tread band of a tyre made in accordance with the present invention has been generally identified by reference numeral 1, the remaining parts of the tyre being not shown as they can be obtained in any manner convenient for a person skilled in the art.

[0034] Defined on the tread band 1 is a plurality of raised blocks 2, 3 each peripherally confined between at least two longitudinal grooves 4 substantially extending circumferentially of the tyre, and at least two transverse grooves 5 meeting the longitudinal grooves 4. Preferably, the longitudinal grooves 4 are consecutively disposed along the circumferential extension of the tyre, to define substantially continuous circumferential grooves 6, 6a delimiting respective circumferential block rows 2, 3. In more detail, in the example shown, at least two circumferential side grooves 6 are defined which are symmetrically spaced apart from an equatorial median plane X-X of the tyre so as to delimit at least two shoulder block 2 rows, extending along the opposite side edges of the tread band 1, and one or more centre block 3 rows disposed symmetrically relative to the equatorial plane X-X. In the embodiment shown, the centre blocks 3 are divided into two circumferential rows separated by a central circumferential groove 6a disposed in the equatorial plane X-X.

[0035] In a preferential embodiment, the longitudinal grooves 4 have an orientation inclined to the circumferential extension direction, so that each of the circumferential 6 and central 6a grooves substantially extends in the form of a broken line.

[0036] By way of example, each longitudinal groove 4 has a depth  $P_1$  included between 8 and 11 mm, and a width  $L_1$  included between 5 and 8 mm measured on an outer rolling surface "S" of the tread band 1.

[0037] The transverse grooves 5 too have a depth  $P_2$  included, just as an indication, between 8 and 11 mm, preferably equal to that of the longitudinal grooves 4, and a width  $L_2$  included between 4.5 and 8.5 mm, progressively increasing larger on moving away from the equatorial plane X-X. In other words, the width of the transverse grooves 5 belonging to the shoulder blocks 2 is preferably greater than the width of the transverse grooves 5 belonging to the centre blocks 3.

[0038] As viewed from Fig. 1, the transverse grooves 5 belonging to the different block rows 2, 3 are consecutively disposed to define substantially continuous transverse grooves 7, of an undulated course, in such a manner that blocks 2, 3 disposed on either side

of the equatorial plane X-X respectively are oriented in respectively opposite directions. In other words, it is preferably provided for the tread band 1 of the tyre in accordance with the invention to have a pattern of the symmetric bidirectional type, the behavioural features of which are not substantially affected by the direction of rotation imposed to the wheel.

[0039] Also provided is at least one first series of sipes 8 and a second series of sipes 9 formed in blocks 2, 3 with a depth  $P_3$  close, just as an indication, to the depth  $P_1$  of the longitudinal 4 and transverse 5 grooves. Sipes 8, 9 have a width preferably not exceeding 0.5 mm and are circumferentially spaced apart from each other of a value  $D_3$  included, just as an indication, between 3 and 6 mm, so as to divide each block 2, 3 into a plurality of flexible portions 10 disposed circumferentially in side by side relationship. Sipes of the first and second series 8, 9 have each an orientation inclined at an angle  $\alpha$  included between 20° and 35° and preferably equal to 25°, relative to a direction "n" normal to the rolling surface "S", so that each flexible portion 10 has an acute-angle grip edge 10a, on the rolling surface itself. Sipes 8, 9 belonging to the first and second series respectively are distinguishable from each other due to the fact that they have respectively opposite inclination directions.

[0040] Preferably, sipes 8, 9 belonging to the first and second series are distributed in respective circumferential rows disposed axially in side by side relationship, preferably in an alternate sequence. In more detail sipes 8, 9 belonging to each of the first and second series can be associated with each of the circumferential rows formed by blocks 2, 3 respectively, in such a manner that each block row 2, 3 has sipes 8, 9 oriented in the opposite direction relative to the sipes of the row or rows of adjacent blocks.

[0041] Advantageously, as viewed from Fig. 1, each sipe 8, 9 extends transversely of the respective block 2, 3 in a curvilinear extension substantially symmetric relative to the transverse centre line of the block itself, or at all events in such a manner that it has a generally concave extension towards the corresponding grip edge 10 exhibited by one of the two flexible portions 10 delimited by the sipe itself.

[0042] Preferably, each sipe 8, 9 substantially extends over the whole width of the respective block 2, 3. In any case, the possibility of providing sipes 8, 9 extending in the block 2, 3 only over part of its width is not to be excluded. In addition, as shown in Fig. 8, it may be also advantageously provided for each sipe 8, 9 to have at least its end portion 9a of reduced depth close to the longitudinal groove 4 delimiting the respective block 3. The depth of the sipe 8, 9 at the end portions 9a can be included, just as an indication, between a zero value and half the depth  $P_3$  of the cut itself.

[0043] The conformation and positioning of the sipes 8, 9 in accordance with the invention is adapted to greatly improve the grip effect of the tyre for the purpose

of improving performance thereof, in particular on acceleration and braking.

[0044] In fact, as can be seen from a comparison between Figs. 2 and 3, when the block 2, 3 is deformed due to deflection against the ground under the footprint the flexible portions 10 are deformed leading the respective grip edges 10a to project from the rolling surface "S" of the tread band 1. Under this circumstance specific pressures of high value are generated on the grip edges 10a, which will promote the tyre grip on the ground. This phenomenon is emphasized when, in the accelerating and braking steps, the ground transmits tangential forces to the block 2, 3, which are directed in the opposite direction to that towards which the acute angles formed by the grip edges 10a of the respective deformable portions 10 are turned. Being the sipes 8, 9 of the first and second series are oriented in opposite ways, both in an accelerating condition and in a braking condition there will be blocks 2 or 3 in the footprint the deformable portions of which are suitable for efficiently transmitting the involved tangential forces.

[0045] In addition, the concave extension of the transverse sipes 8, 9 is of such a nature that, mainly when a longitudinal sliding of block 2, 3 on a snow-covered or frozen roadway starts, the grip edges 10a of the flexible portions 10 tend to pick up and accumulate snow and ice towards the longitudinal centre line of the block itself, entrapping them at the inside of the sipe 8, 9. Thus a further favourable condition for transmission of tangential forces is determined, being the friction created by snow against snow greater than friction of rubber on snow. Snow and/or ice accumulation in the transverse sipes 8, 9 also emphasizes deformation of the flexible portions 10 and, therefore, projection of the grip edges 10a.

[0046] In accordance with a further aspect of the invention, in order to improve the tyre behaviour it may be advantageously provided that each transverse groove 5, preferably extending in a direction parallel to the extension of the sipes 8, 9 should be confined between a first side 11 substantially normal to the rolling surface "S" and a second side 12 diverging from the first side 11 in the direction of the rolling surface itself. Preferably, the second side 12 of each transverse groove 5 has an orientation parallel to, or at all events concordant with the orientation of the transverse groove 5 itself. Just as an indication, the second side 12 of each transverse hollow may define an angle of a value included between 20° and 35° relative to a direction normal to the rolling surface "S".

[0047] In this way each transverse groove 5 may be given an important width, which is advantageous for an efficient draining of water when the tyre is run on wet roadways, and the flexible portions 10 projecting into the groove itself may substantially have the same shape as that of the remaining flexible portions 10 or a similar one. This aspect is particularly advantageous also for even wearing of blocks 2, 3.

[0048] It may be also advantageously provided that each block 2, 3 should have, at the second side 12 of the respective transverse hollow 5, a transverse edge 13 projecting towards the inside of the groove itself. This transverse edge 13, located close to the rolling surface "S" advantageously forms an undercut 13a with the second side 12 of the transverse groove 5.

[0049] Under this circumstance the projecting edge 13 is adapted to supply a further grip seat on the ground, as well as to promote accumulation of snow and ice within the transverse groove 5, especially all when the block 2, 3 has a tendency to slide on the snow-covered surface in an opposite direction relative to the orientation of the respective grip edges 10a.

[0050] In a preferential embodiment, each of the longitudinal grooves 4 too is provided to be confined between a respective first side 14 substantially normal to the rolling surface "S" and a second side 15 diverging from the first side 14 preferably with an inclination included between 20° and 35°, in the direction of the rolling surface itself.

[0051] As can be viewed from a comparison between Figs. 4 and 5, taking into account the corresponding lines IV and V reproduced in Fig. 1, it is also preferably provided that the mutual positioning of the first and second sides 14 and 15 in each longitudinal groove 4 should be inverted relative to the configuration found in the circumferentially adjacent longitudinal grooves 4.

[0052] In addition, each block 2, 3 may have at least one longitudinal edge 16 projecting towards the respective longitudinal groove 4, so as to define an undercut 16a with the second side 15 of the longitudinal groove itself.

[0053] In order to further improve tractive power and braking performance of the tyre, each of the flexible portions 10 may be also provided to have one or both ends 10b thereof oriented obliquely relative to the longitudinal groove or grooves 4 delimiting the respective block 2, 3. Thus side toothings projecting into the longitudinal grooves 4 are defined in block 2, 3, the presence of said toothings improving the grip effect of the tyre on snow-covered roadways.

[0054] The present invention thus achieves the intended purposes.

[0055] The innovative expedients proposed by the invention in fact represent important improvements in terms of traction power and braking performance of the tyre, particularly due to the particular conformation and arrangement of the sipes.

[0056] The particular profile in section of the transverse and longitudinal grooves, also leaving out of consideration the curvilinear-extension conformation of the sipes, cooperates in a synergic manner with said sipes in improving the operating behaviour of the block with further improvements in terms of traction power and braking performance. In addition, the conformation of the longitudinal and transverse grooves ensures an

excellent wearing evenness of the individual blocks, eliminating or at all events greatly restricting phenomena of early wear at the perimetral edges of the blocks themselves. The conformation of the longitudinal and transverse grooves in addition ensures an efficient water removal from the footprint when the tyre is run on a wet roadway.

[0057] The transverse 13 and longitudinal 16 projecting edges exhibited by blocks 2, 3 close to the rolling surface also help in improving tractive power and braking performance.

[0058] On the other hand, it is to note that said projecting edges are located at the block regions where, by effect of deformation of the flexible portions, the involved specific pressures are of a relatively moderate amount. Therefore corners formed by the projecting edges are not affected by localized early wearing phenomena.

#### Claims

1. A tyre for vehicle wheels provided with a tread band (1) comprising:

- a plurality of raised blocks (2, 3) each peripherally confined between at least two longitudinal grooves (4) substantially extending circumferentially of the tyre, and at least two transverse grooves (5) meeting said longitudinal grooves (4);
- a first series of sipes (8) and a second series of sipes (9) formed in said blocks (2, 3), each according to an inclined orientation relative to a direction normal to an outer rolling surface (S) of the tread band (1), to divide each block (2, 3) into a plurality of flexible portions (10) disposed circumferentially in side by side relationship, each having a grip edge (10a) in the form of an acute angle on said outer rolling surface (S),

characterized in that each sipe (8, 9) extends transversely of the block (2, 3) according to a concave extension towards the grip edge (10a) of the corresponding flexible portion (10).

2. A tyre as claimed in claim 1, wherein the sipes (8, 9) belonging to the first series and the second series are distributed in respective circumferential rows disposed axially in side by side relationship.
3. A tyre as claimed in claim 2, wherein the circumferential rows of sipes (8, 9) belonging to the first and second series respectively are mutually arranged in an alternate sequence.
4. A tyre as claimed in claim 2, wherein each circumferential row of sipes (8, 9) belonging to the first and

second series respectively is associated with a respective circumferential row of blocks.

5. A tyre as claimed in claim 1, wherein each sipe (8, 9) extends transversely of the block substantially over the whole width thereof.

6. A tyre as claimed in claim 5, wherein each sipe (8, 9) has at least one end portion (9a) of reduced depth close to the longitudinal groove (4) delimiting the respective block (2, 3).

7. A tyre as claimed in claim 1, wherein each sipe (8, 9) has a substantially curvilinear extension symmetric with respect to the longitudinal centre line of the respective block.

8. A tyre as claimed in claim 1, wherein each of said flexible portions (10) has at least one end (10b) inclined with respect to the extension direction of the corresponding longitudinal groove (4), to define in said block (2, 3) side toothings projecting into the longitudinal grooves (4).

9. A tyre for vehicle wheels, in particular as claimed in claim 1, characterized in that each of said transverse grooves (5) is confined between a first side (11) substantially normal to the outer rolling surface (S) of the tread band (1), and a second side (12) diverging from the first side towards the rolling surface itself.

10. A tyre as claimed in claim 9, wherein said second side (12), relative to the rolling surface (S), has an orientation concordant with that of the sipes (8, 9) of the corresponding block (2, 3).

11. A tyre as claimed in claim 9, wherein each block (2, 3), close to said rolling surface (S), has at least one transverse edge (13) projecting towards the corresponding transverse groove (5) to define an undercut (13a) with the second side (12) of the transverse groove itself.

12. A tyre as claimed in claim 9, wherein each of said transverse grooves (5) extends in a direction substantially parallel to the extension of the sipes (8, 9).



13. A tyre as claimed in claim 9, wherein the transverse grooves (5) belonging to blocks (2, 3) disposed mutually in side by side relationship in an axial direction are consecutively disposed so as to define substantially continuous transverse grooves (7) extending according to an undulated course.







14. A tyre as claimed in claim 9, wherein each of said longitudinal grooves (4) is confined between a first side (14) substantially normal to the rolling surface

(S) and a second side (15) diverging from the first side (14) in the direction of the rolling surface itself.

15. A tyre as claimed in claim 14, wherein each of said blocks has, close to the rolling surface (S), at least one longitudinal edge (16) projecting towards the corresponding longitudinal groove (4), to define an undercut with the second side (15) of the longitudinal groove itself.
  - 5
  - 10
16. A tyre as claimed in claim 14, wherein in each of said longitudinal grooves (4) the mutual positioning of the first and second sides (14, 15) is inverted relative to the mutual positioning of the first and second sides of the circumferentially contiguous longitudinal grooves (4).
  - 15
17. A tyre as claimed in claim 1, wherein said longitudinal grooves (4) are consecutively disposed so as to define substantially continuous circumferential grooves (6, 6a).
  - 20
18. A tyre as claimed in claim 17, wherein each of said longitudinal grooves (4) has an inclined extension relative to a direction circumferential to the tyre, so that each of said circumferential grooves (6, 6a) extends in the form of a broken line.
  - 25
19. A tyre as claimed in claim 1, wherein at least two circumferential rows of shoulder blocks (2) are provided, which extend close to the opposite side edges of the tread band (1), as well as one or more circumferential rows of centre blocks (3) disposed symmetrically relative to an equatorial plane (X-X) of the tyre, the blocks disposed on either side of the equatorial plane respectively having correspondingly opposite orientations.
  - 30
  - 35
20. A method of increasing snow trapping in tread patterns for tyres of vehicle wheels, comprising the steps of:
  - 40
  - making rows of blocks (2, 3), each confined between longitudinal (4) and transverse (5) grooves relative to a circumferential extension direction of the tyre,
    - 45
  - dividing each block (2, 3) into a plurality of flexible portions (10) by a plurality of sipes (8, 9) extending inwardly of the tyre starting from a radially outer rolling surface (S);
    - 50
  - shaping said sipes (8, 9) according to a concave line on said rolling surface (S); and
    - 55
  - inclining each sipe (8, 9) preferably at an angle included between 20° and 35° relative to a straight line normal to the rolling surface (S).



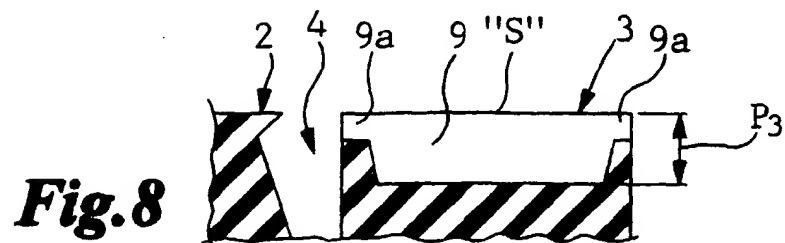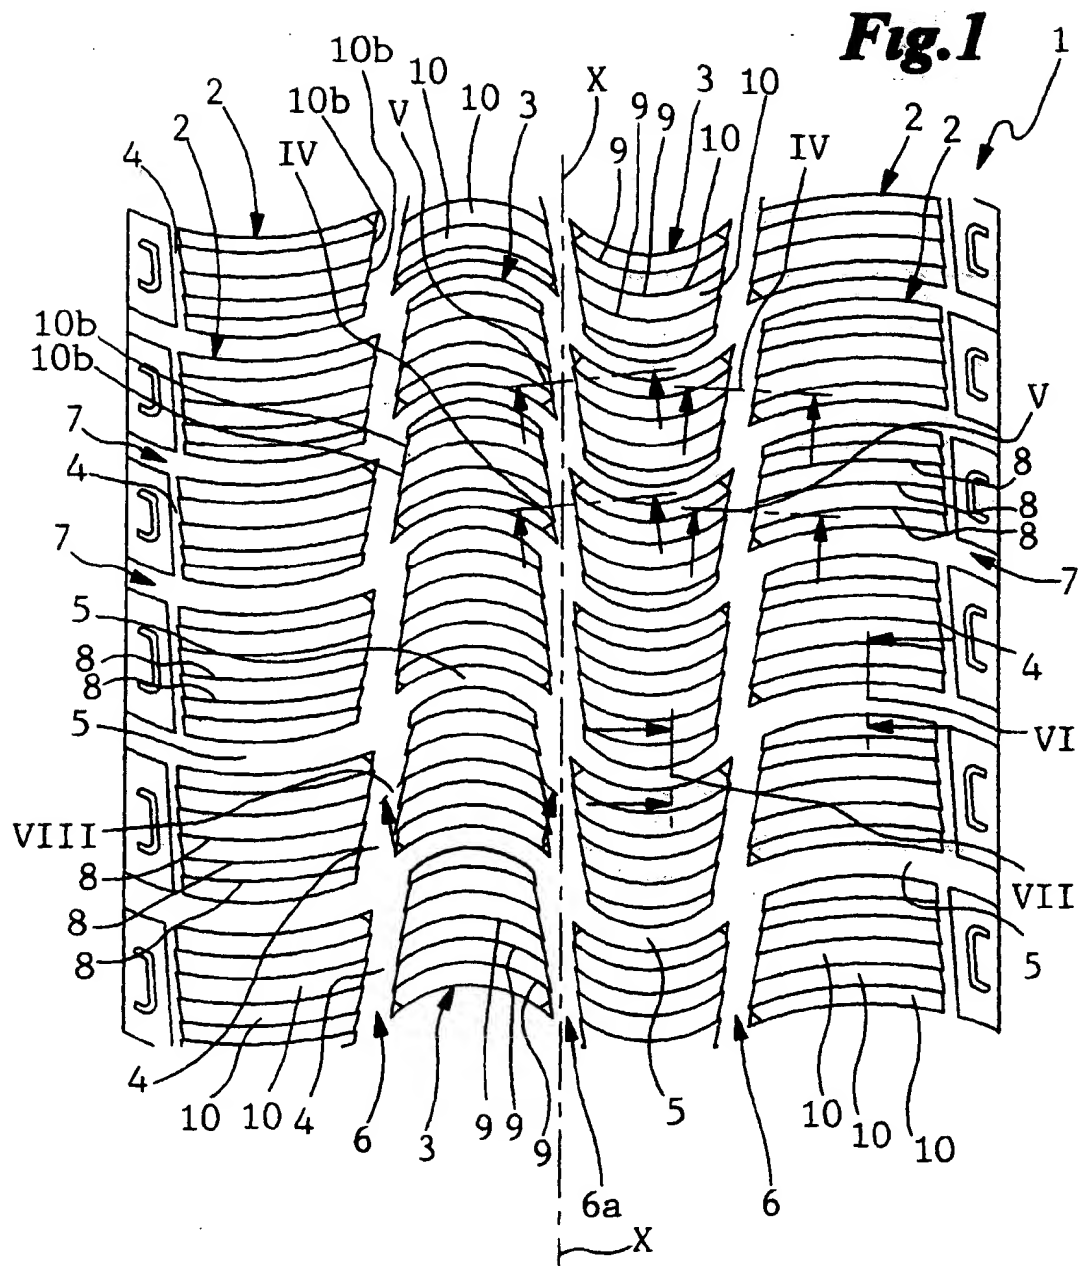

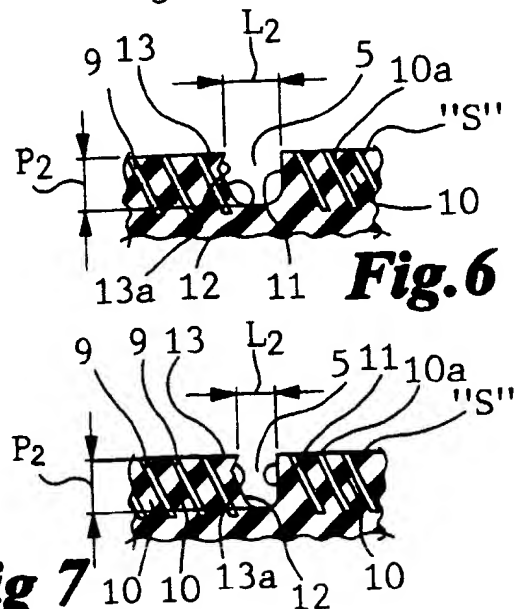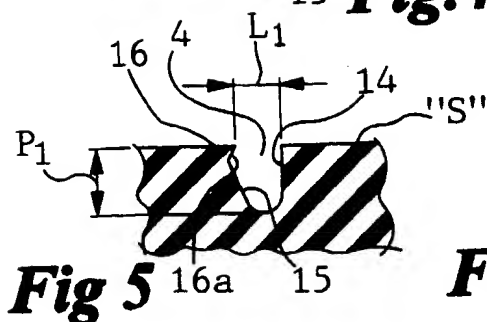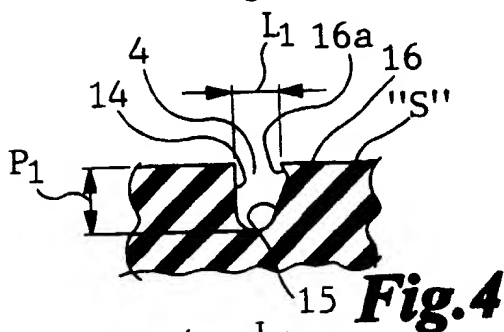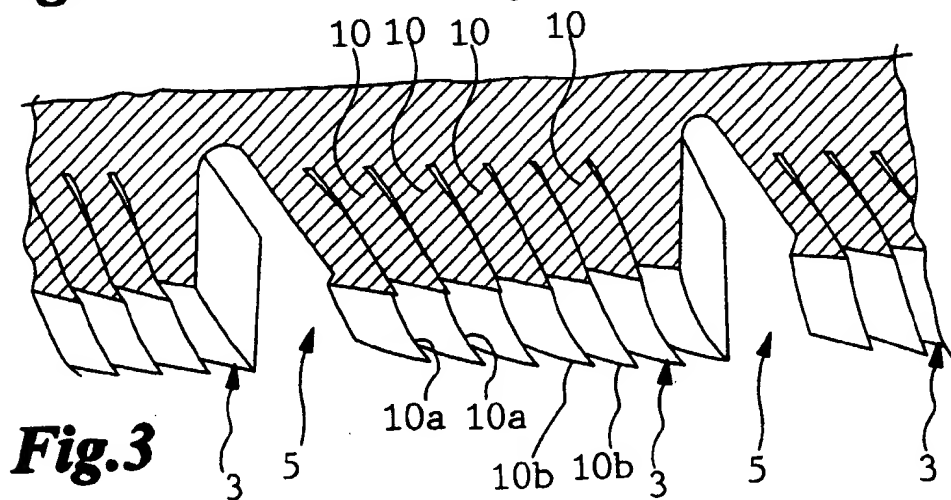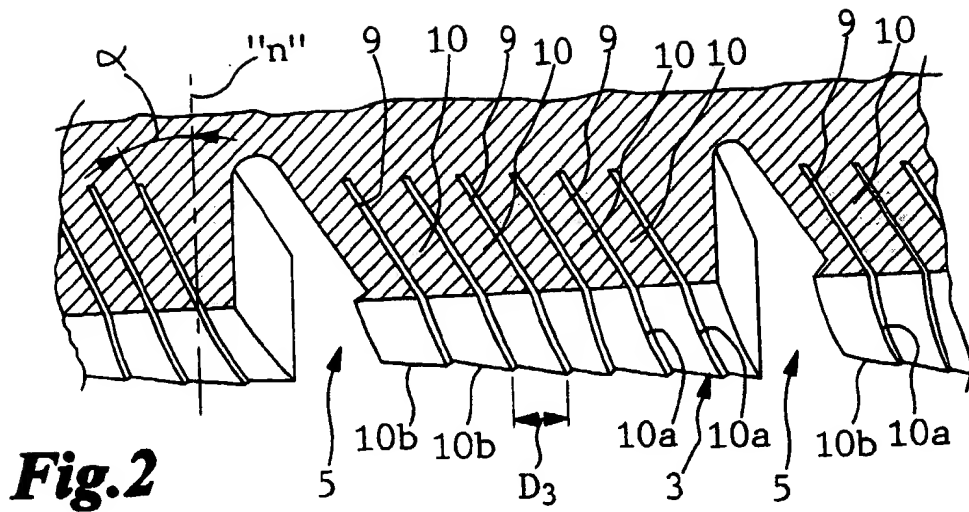



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 12 5270

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,Y	US 4 298 046 A (FLECHTNER CHARLES ET AL) 3 November 1981 (1981-11-03) * column 4, line 14 - line 20; claims; figures *	1-5	B60C11/12 B60C11/13
Y	FR 809 470 A (L. RENAULT) 3 March 1937 (1937-03-03) * page 1, right-hand column, line 44 - line 55; claims; figures *	1-5	
A	US 5 386 861 A (OVERHOFF DIETRICH ET AL) 7 February 1995 (1995-02-07) * claims; figures *	8,14	
A	GB 2 093 777 A (GEN TIRE & RUBBER CO) 8 September 1982 (1982-09-08) * page 3, line 1 - line 27; claims; figures *	1,9,10	
A	US 5 679 186 A (YAMAMOTO AKIO ET AL) 21 October 1997 (1997-10-21) * claims; figures *	1,9,10	
A	EP 0 788 900 A (CONTINENTAL AG) 13 August 1997 (1997-08-13) * column 7, line 1 - line 10; claims; figures 2B,2D *	5,6	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B60C
A	DE 39 43 014 A (BRIDGESTONE CORP) 28 June 1990 (1990-06-28)	17,18	
A	DE 197 11 852 A (SEMPERIT REIFEN) 11 December 1997 (1997-12-11)	1	
A	EP 0 810 104 A (GOODYEAR TIRE & RUBBER) 3 December 1997 (1997-12-03) * page 5, column 7, line 29 - line 35; claims; figures *	1	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>31 March 2000</b>	Examiner <b>Baradat, J-L</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1505 03.92 (P/4001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 12 5270

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-03-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4298046 A		03-11-1981	FR 2461602 A	06-02-1981
			AT 381475 B	27-10-1986
			AT 383780 A	15-03-1986
			BE 884334 A	17-11-1980
			CA 1142073 A	01-03-1983
			CH 637886 A	31-08-1983
			DE 3028112 A	05-02-1981
			DK 320280 A,B,	25-01-1981
			FI 802347 A,B,	25-01-1981
			GB 2053817 A,B	11-02-1981
			JP 1034161 B	18-07-1989
			JP 1550679 C	23-03-1990
			JP 56021905 A	28-02-1981
			LU 82647 A	24-10-1980
			NL 8004266 A,B,	27-01-1981
			NO 802242 A,B,	26-01-1981
			SE 442495 B	13-01-1986
			SE 8005333 A	25-01-1981
FR 809470	A	03-03-1937	NONE	
US 5386861	A	07-02-1995	DE 4138688 A	27-05-1993
			AT 133614 T	15-02-1996
			CA 2083626 A,C	26-05-1993
			DE 59205236 D	14-03-1996
			DK 544235 T	20-05-1996
			EP 0544235 A	02-06-1993
			FI 925346 A	26-05-1993
			JP 2700984 B	21-01-1998
			JP 5238211 A	17-09-1993
			NO 177990 B	25-09-1995
GB 2093777	A	08-09-1982	DE 3146362 A	02-09-1982
			FR 2500375 A	27-08-1982
			IT 1139834 B	24-09-1986
			JP 57147902 A	13-09-1982
			LU 83930 A	13-12-1982
			PT 74460 A,B	01-03-1982
US 5679186	A	21-10-1997	JP 2774778 B	09-07-1998
			JP 8169215 A	02-07-1996
EP 0788900	A	13-08-1997	DE 19604130 A	07-08-1997
			DE 59700011 D	24-09-1998
			JP 9216503 A	19-08-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 12 5270

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-03-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3943014 A	28-06-1990	JP 2175302 A	06-07-1990
		FR 2640913 A	29-06-1990
DE 19711852 A	11-12-1997	AT 404342 B	27-10-1998
		AT 57696 A	15-03-1998
		NO 971227 A	30-09-1997
		SE 512326 C	28-02-2000
		SE 9700890 A	30-09-1997
EP 0810104 A	03-12-1997	CA 2205794 A	28-11-1997
		FI 972206 A	29-11-1997
		PL 320244 A	08-12-1997

EPO FORM P469

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82